


**CARACTERÍSTICAS / FEATURES**

Material SMC  
 Acabado decapado e hidrofugado  
 Dimensiones 99 x 40 x 40 cm  
 Color ver carta de colores  
 Fijación simplemente apoyado o mediante varilla metálica  
 Peso / Capacidad 80 Kg / 45 L  
 Palet 99 x 40 x 40 cm  
 Peso pallet 110 Kg



Material SMC  
 Finish scaled and waterproofed  
 Dimensions 99 x 40 x 40 cm  
 Colour see colour catalogue  
 Fixing resting on the ground or with metal rod  
 Weight / Capacity 80 Kg / 45 L  
 Pallet 99 x 40 x 40 cm  
 Weight pallet 110 Kg

dineñador / design: Estudi Ribaudi




**GEOMETRIA / GEOMETRY**

SISTEMA DE FIJACIÓN / ANCHORAGE SYSTEM

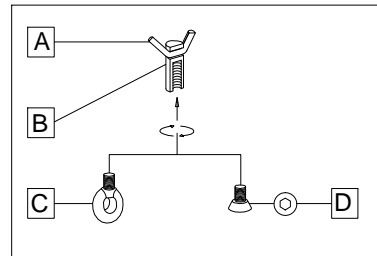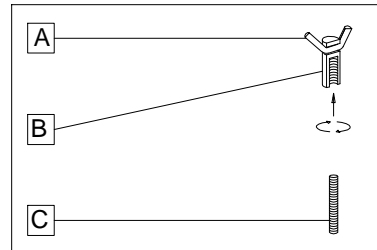


SISTEMA DE ELEVACIÓN / LIFTING SYSTEM

- A barra corrugada / corrugated rod
- B casquillo roscado / thread sleeve
- C cáncamo / eyebolt
- D tapa / stopper
- E varilla roscada / thread the rod

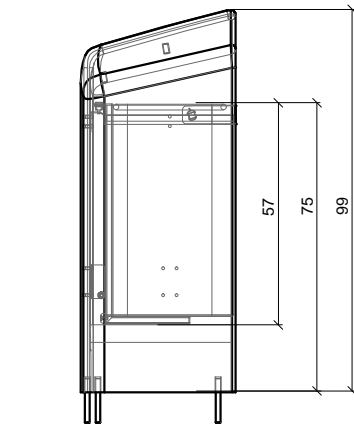


ALZADO / FRONT VIEW

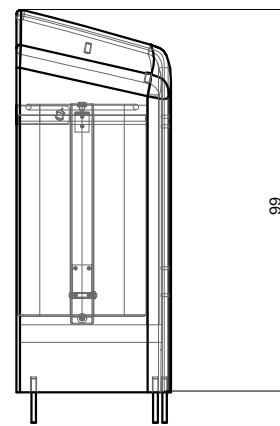


ALZADO / FRONT VIEW





ISOMETRICA /



PLANTA / TOP



**ESPECIFICACIONES / SPECIFICATIONS**

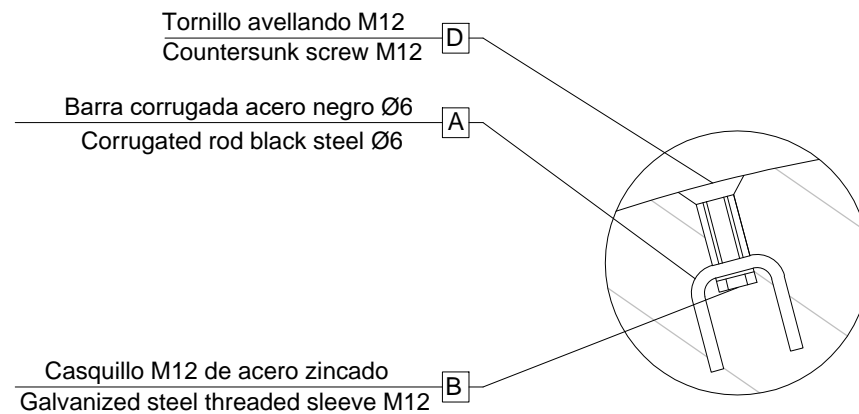
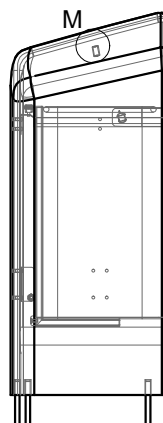


DETALLE M / DETAIL M

**MANIPULACIÓN E INSTALACIÓN / HANDLING AND INSTALLATION**

1 extraer tapas y enroscar cáncamo  
 extract stoppers & thread the eyebolt

2 elevar y enroscar la varilla.  
 enlever la pièce et visser la tige.

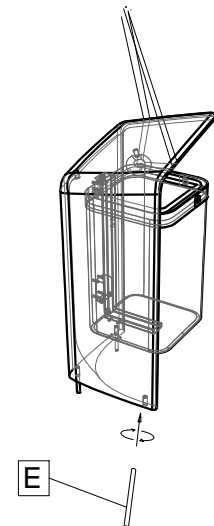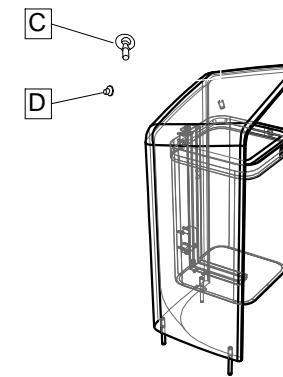

3 perforar y verter resina epoxy  
 perforer un trou et verser résine epoxy

4 insertar la varilla en el agujero  
 insérez la tige de métal dans le trou

elevación / hoisting  
 P= 65 Kg

