


CARACTERISTICAS / FEATURES

Material	SMC
Acabado	decapado e hidrofugado
Dimensiones	99 x 40 x 40 cm
Color	ver carta de colores
Fijación	simplemente apoyado o mediante varilla metálica
Peso / Capacidad	80 kg / 45 L
Palet	99 x 40 x 40 cm
Peso pallet	110 Kg



Material	SMC
Finish	scaled and waterproofed
Dimensions	99 x 40 x 40 cm
Colour	see colour catalogue
Fixing	resting on the ground or with metal rod
Weight / Capacity	80 kg / 45 L
Pallet	99 x 40 x 40 cm
Weight pallet	110 Kg

diseñador / design: Estudi Ribaudi




GEOMETRIA / GEOMETRY

SISTEMA DE FIJACION / ANCHORAGE SYSTEM

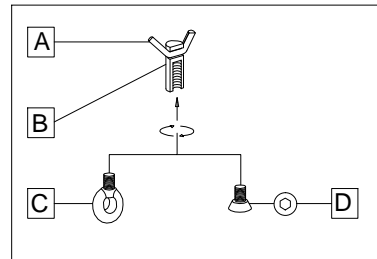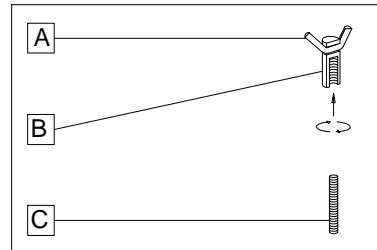


SISTEMA DE ELEVACION / LIFTING SYSTEM


- A** barra corrugada / corrugated rod
- B** casquillo roscado / threaded sleeve
- C** cáncamo / eyebolt
- D** tapa / stopper
- E** varilla roscada / threaded rod

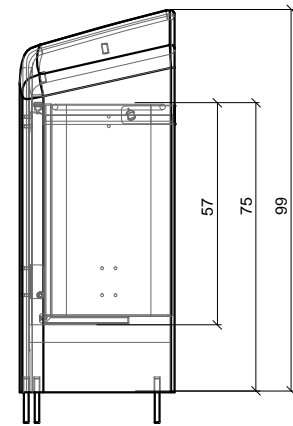


ALZADO / FRONT VIEW

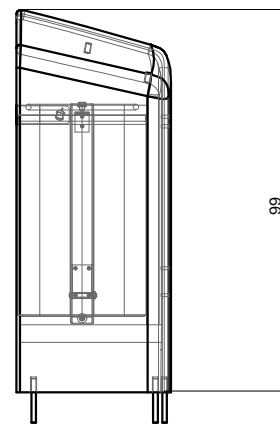


ALZADO / FRONT VIEW




ISOMETRICA /



PLANTA / TOP



ESPECIFICACIONES / SPECIFICATIONS

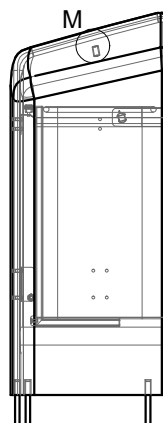

Tornillo avellanado M12
Countersunk screw M12


Barra corrugada acero negro Ø6
Corrugated black steel rod Ø6

Casquillo M12 de acero zincado
Galvanized steel threaded sleeve M12


DETALLE M / DETAIL M

MANIPULACION E INSTALACION / HANDLING AND INSTALLATION


- 1 Extraer tapas y enroscar cáncamo.
Extract stoppers & thread the eyebolt.

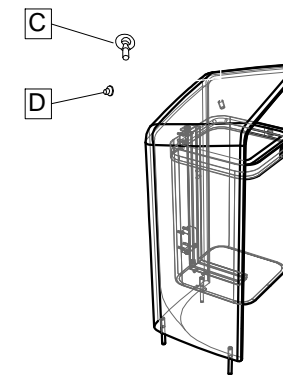

- 2 Elevar y enroscar la varilla.
Lift and thread the rod.

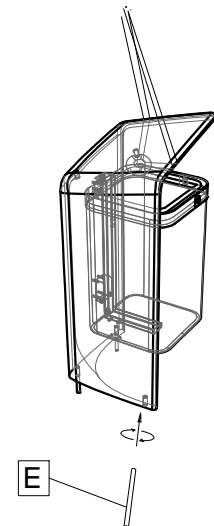

- 3 Perforar y verter resina epoxi
Drill and pour epoxy resin

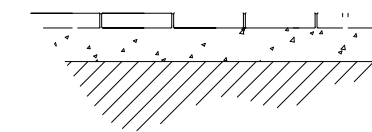

- 4 Insertar varilla roscada en agujero
Insert metal threaded rod in hole

elevación / hoisting
P= 65 kg

