


CARACTERISTICAS / FEATURES





Material hormigón petra 1
Acabado decapado e hidrofugado
Dimensiones l. 260, a. 114, h. 69 cm.
Color ver carta de colores
Fijación simplemente apoyado o mediante varillas metálicas
Peso 1600 kg
Palet 265 x 118 x 89cm
Peso palet 1615 kg

Material precast concrete petra 1
Finish scaled and waterproofed
Dimensions l. 260, w. 144, h. 69 cm
Colour see colour catalogue
Fixing resting on the ground or anchored with metal rod
Weight 1600 kg
Pallet 265 x 118 x 89 cm
Weight pallet 1615 kg

diseñador / design: Ton Riera

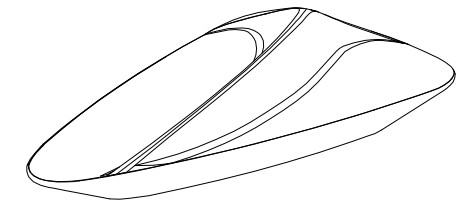



GEOMETRIA / GEOMETRY

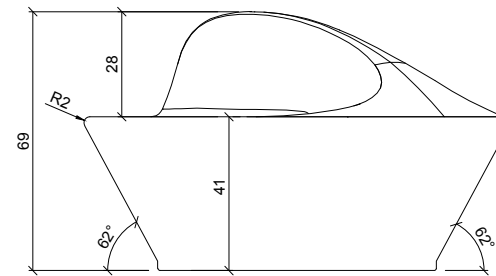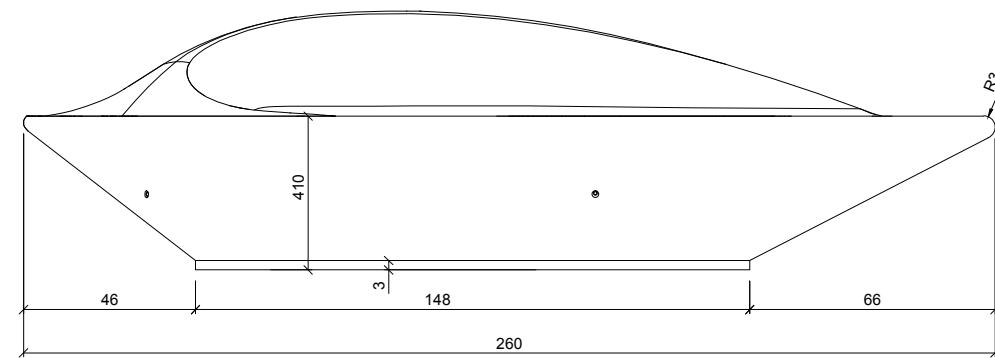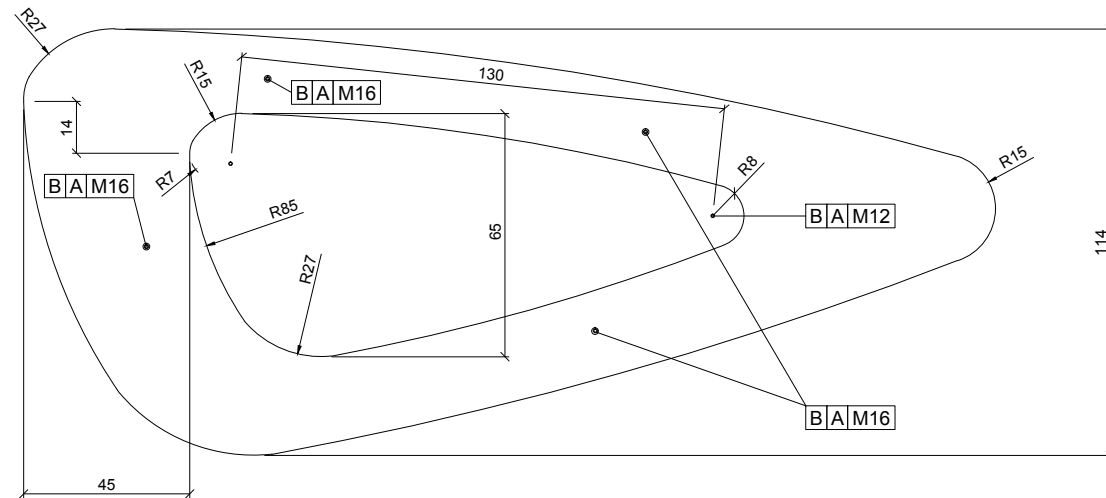


- A barra corrugada / corrugated rod
- B casquillo roscado / threaded sleeve
- C varilla roscada / threaded rod
- D cáncamo / eyebolt

MANIPULACION E INSTALACION / HANDLING AND INSTALLATION


- 1 Enroscar cáncamo, elevar y enroscar la varilla. Thread the eyebolt, lift and thread the rod
- 2 Perforar 2 agujeros a distancia de ±130 cm Drill 2 holes each at a distance of ±130 cm

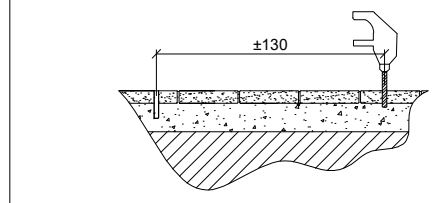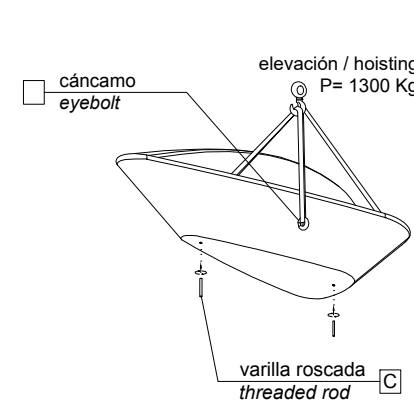


- 3 Verter resina epoxi / pour epoxy resin

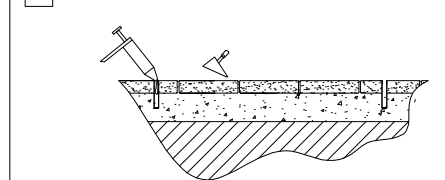


- 4 Insertar la varilla en el agujero Insert metal rod in hole

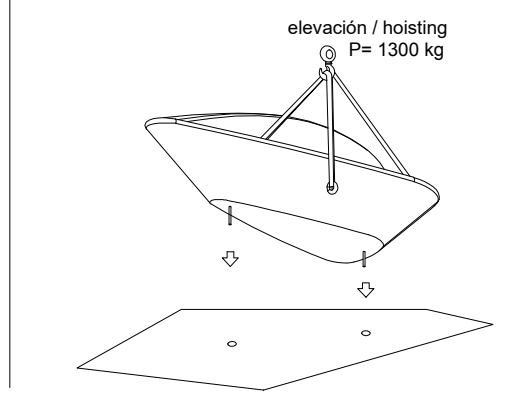


SISTEMA DE FIJACION / ANCHORAGE SYSTEM

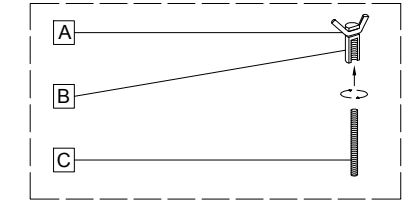


SISTEMA DE ELEVACION / LIFTING SYSTEM

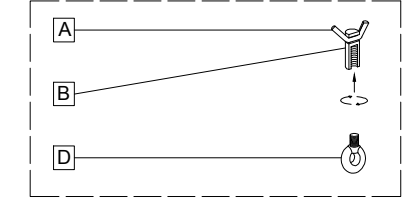

ESPECIFICACIONES / SPECIFICATIONS

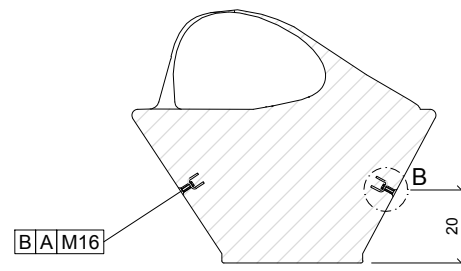

SECCION 1 / SECTION 1

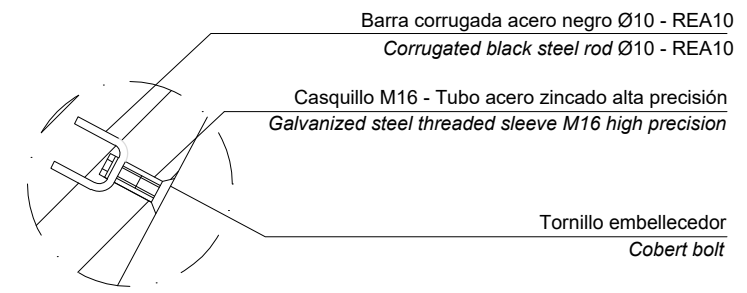

DETALLE B / DETAIL B