

CARACTERISTICAS / FEATURES

Material hormigón petra 1
Acabado decapado e hidrofugado
Dimensiones l. 222, a.59,3, h. 49,6 cm
Color ver carta de colores
Fijación simplemente apoyado o mediante varillas metálicas
Peso 530 kg`
Palet 230 x 60 x 65 cm
Peso palet 585 kg



Material concrete petra 1
Finish scaled and waterproofed
Dimensions l. 222, w. 59.3, h. 49.6 cm
Colour see colour catalogue
Fixing resting on the ground or anchored with metal rod
Weight 530 kg
Pallet 230 x 60 x 65 cm
Weight pallet 585 kg

diseñador / design: EMBT, Benedetta Tagliabue




VINYES R250

GEOMETRIA / GEOMETRY

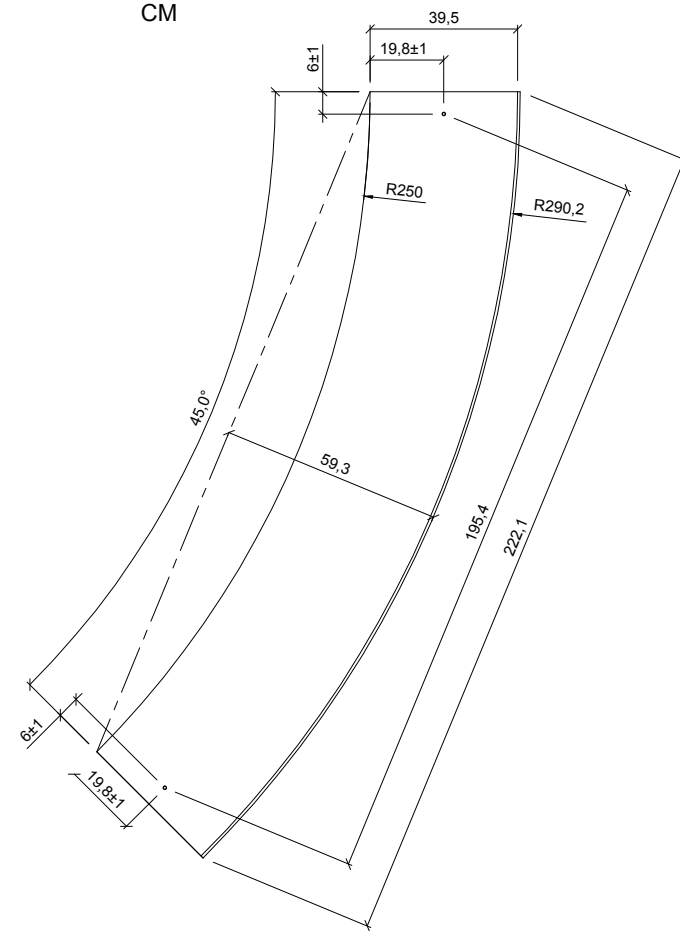


VISTA INFERIOR / BOTTOM VIEW

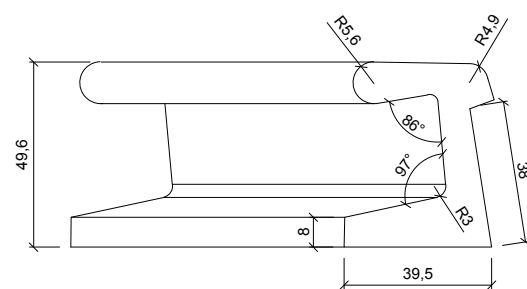


ALZADO / FRONT VIEW


ESPECIFICACIONES / SPECIFICATIONS




SECCION 1 / SECTION 1



SECCION 2/ SECTION 2

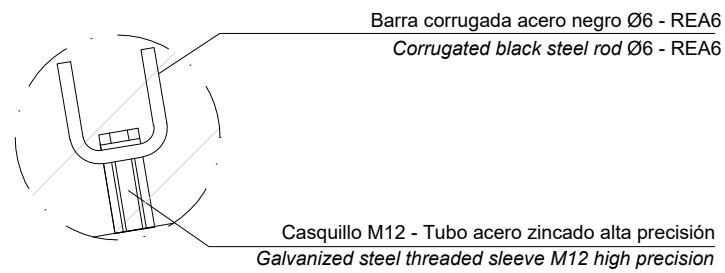


DETALLE B / DETAIL B
 [ELEVACION / HOISTING]

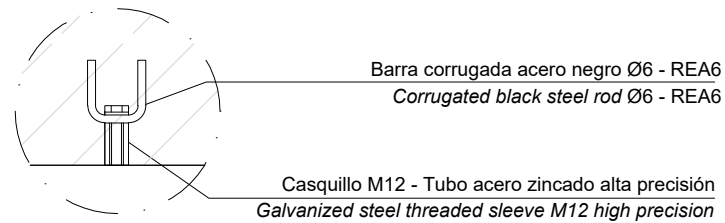


DETALLE C / DETAIL C
 [ANCLAJE / ANCHORAGE]

MANIPULACION E INSTALACION / HANDLING AND INSTALLATION

- 1 Enroscar cáncamo, elevar y enroscar la varilla
 Thread the eyebolt, lift and thread the rod

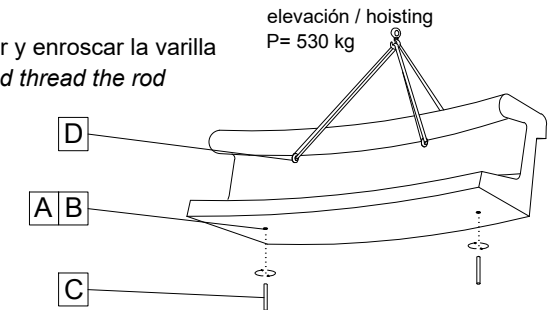


SISTEMA DE ELEVACION / ANCHORAGE SYSTEM

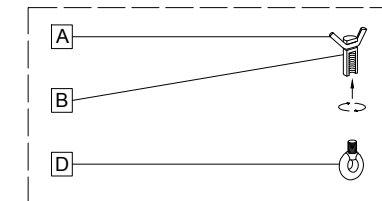

- A barra corrugada / corrugated rod
- B casquillo roscado / threaded sleeve
- D cáncamo / eyebolt

SISTEMA DE FIJACION / LIFTING SYSTEM

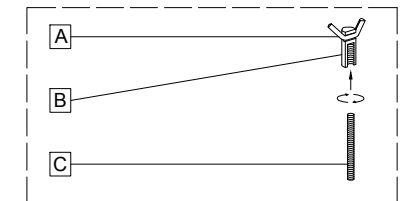

- A barra corrugada / corrugated rod
- B casquillo roscado / threaded sleeve
- C varilla roscada / threaded rod

- 2 Perforar 2 agujeros a distancia ± 195,4 cm
 Drill 2 holes each at a distance ± 195.4 cm
- 3 Verter resina epoxi / Pour epoxy resin



- 4 Insertar la varilla en el agujero
 Insert metal rod in hole

