

CARACTERISTICAS / FEATURES

Material hormigón Petra 1
Acabado decapado e hidrofugado
Dimensiones l. 155, a. 60, h. 85 cm
Color ver carta de colores
Fijación con varillas metálicas
Peso 875 kg
Palet 170 x 70 cm


Material precast concrete Petra 1
Finish scaled and waterproofed
Dimensions l. 155, w. 60, h. 85 cm
Colour see colour catalogue
Fixing with metal rods
Weight 875 kg
Pallet 170 x 70 cm

diseñador / design: Javier Gorostidi - Bernardo del Pino




BÉCQUER CÓNCAVO R.INT.14.7


GEOMETRIA / GEOMETRY

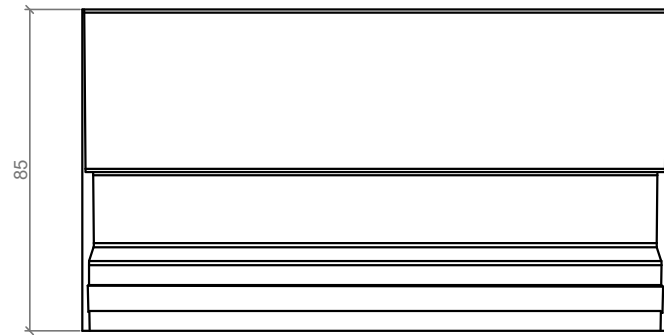

ALZADO FRONTAL / FRONT VIEW

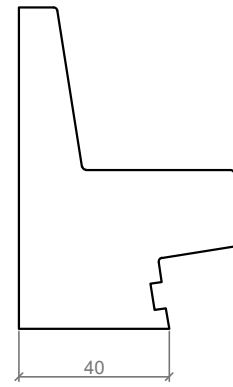


PERFIL / PROFILE

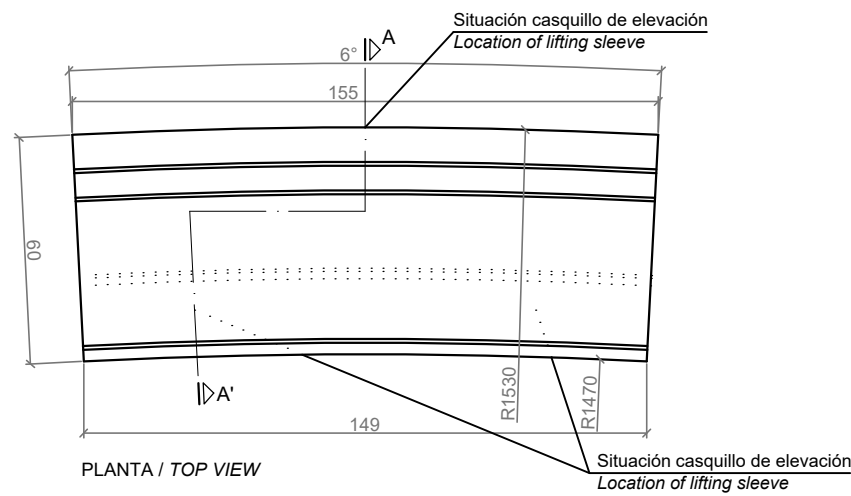


PLANTA / TOP VIEW

ESC. 1:20


MANIPULACION E INSTALACION / HANDLING AND INSTALLATION

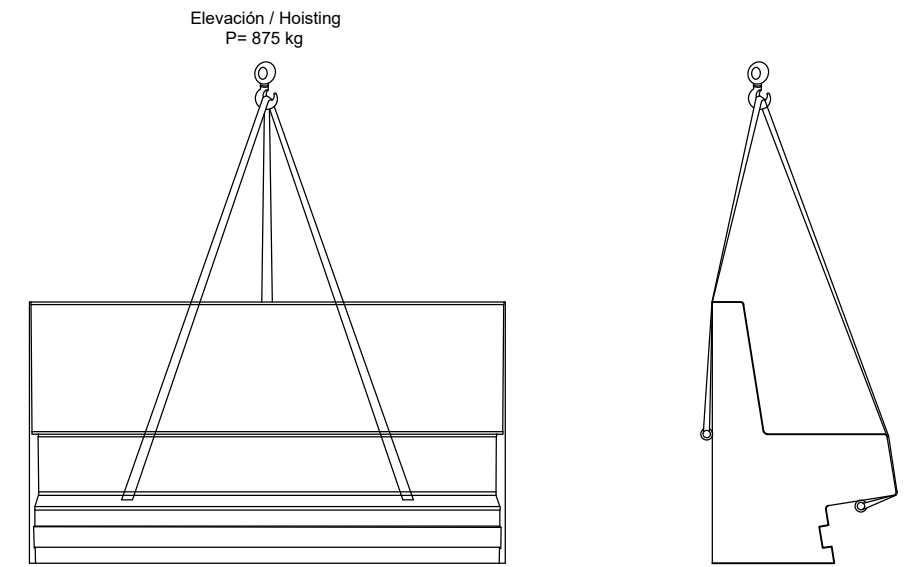

ESPECIFICACIONES / SPECIFICATIONS

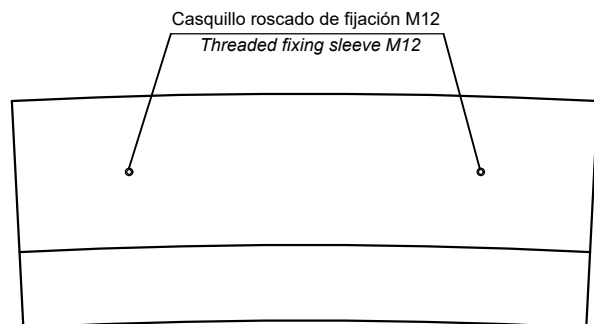

PLANTA INFERIOR / BOTTOM VIEW

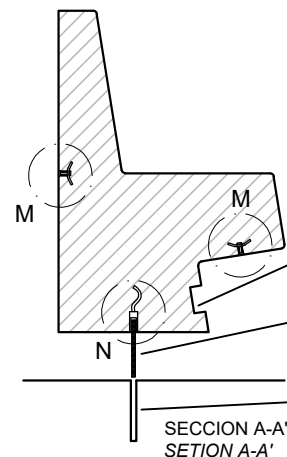

SECCION A-A' / SECTION A-A'

Encaje para luminaria LED
 Socket for LED luminaire
 Varilla roscada fijación M12 x 140
 Threaded fixing rod M12 x 140
 Sistema de fijación: a base cimentada taladrar pavimento Ø40 mm, rellenar con mortero rico o resina
 Fixing system: to a cemented base drill pavement Ø40 mm, fill with rich mortar or resin

Casquillo roscado de elevación M12
 Threaded fixing sleeve M12

Tornillo avellanado M12
 Countersunk screw M12

DETALLE M / DETAIL M

Casquillo roscado de fijación M12
 Threaded fixing sleeve M12

DETALLE N / DETAIL N

Tàrrega, Lleida - Tel. +34 973 15 87 03 - www.magourban.com - info@magourban.com